


O-ring

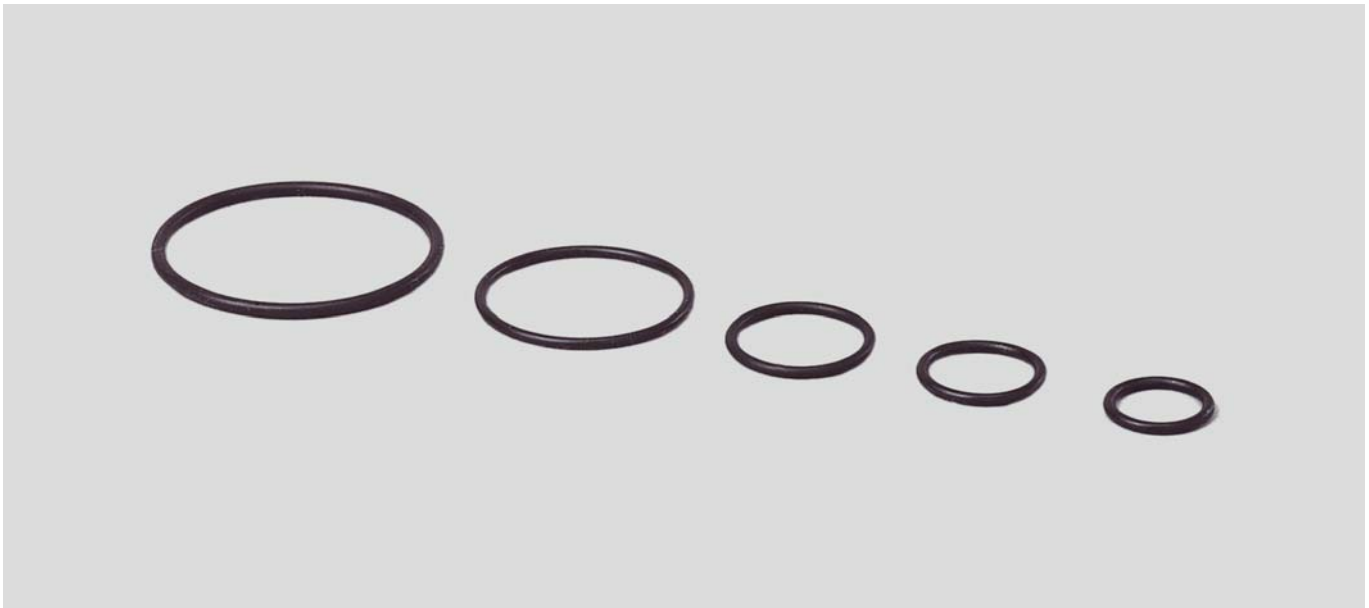

O-ring

O-rings for sealing against water, dust and oil.

Material

NBR


Technical data

Temperature range: -30°C up to +120°C

Application

- Plant and machine construction
- Robotics
- Automation technology
- Vehicle construction and shipbuilding
- Railway technology
- Installation technology
- Control cabinet construction

- halogen-free
- phosphor-free
- silicone-free



Dimensions

D Outer diameter
d Inner diameter
s Thickness

Metric thread

Part no.	Size	Inner Ø mm	Outer Ø mm	Thickness mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90263	M12 x 1,5	9,0	12,0	1,5	100	o. r.	o. r.	o. r.
90264	M16 x 1,5	13,0	16,0	1,5	100	o. r.	o. r.	o. r.
90265	M20 x 1,5	17,0	20,0	1,5	100	o. r.	o. r.	o. r.
90266	M25 x 1,5	22,0	26,0	2,0	100	o. r.	o. r.	o. r.
90267	M32 x 1,5	29,0	33,0	2,0	100	o. r.	o. r.	o. r.
90268	M40 x 1,5	35,0	39,0	2,0	100	o. r.	o. r.	o. r.
90269	M50 x 1,5	45,0	49,0	2,0	100	o. r.	o. r.	o. r.
90270	M63 x 1,5	59,0	63,0	2,0	100	o. r.	o. r.	o. r.

PG thread

Part no.	Size	Inner Ø mm	Outer Ø mm	Thickness mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
96366	7	10,0	13,0	1,5	100	o. r.	o. r.	o. r.
96367	9	13,0	16,0	1,5	100	o. r.	o. r.	o. r.
96368	11	16,0	19,0	1,5	100	o. r.	o. r.	o. r.
96369	13,5	18,0	21,0	1,5	100	o. r.	o. r.	o. r.
96370	16	20,0	23,0	1,5	100	o. r.	o. r.	o. r.
96371	21	25,0	29,0	2,0	100	o. r.	o. r.	o. r.
96372	29	33,0	37,0	2,0	100	o. r.	o. r.	o. r.
96373	36	43,0	47,0	2,0	100	o. r.	o. r.	o. r.
96374	42	50,0	54,0	2,0	100	o. r.	o. r.	o. r.
96375	48	55,0	59,0	2,0	100	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request